# DRAFT ENVIRONMENTAL IMPACT REPORT

FOR THE

# COCHRANE ROAD PLANNED UNIT DEVELOPMENT

SCH# 2004112060

VOLUME III OF III - APPENDICES

*PREPARED FOR:*

CITY OF MORGAN HILL
Community Development Department
17555 Peak Avenue
Morgan Hill, CA 95037-4128

*PREPARED BY:*

PMC
PACIFIC MUNICIPAL CONSULTANTS

JULY 2005

# Technical Appendices

Appendix K – Transportation and Circulation

Fehr and Peers, Inc. Transportation Consultants. Cochrane Road PUD, Morgan Hill, California. July 2005.

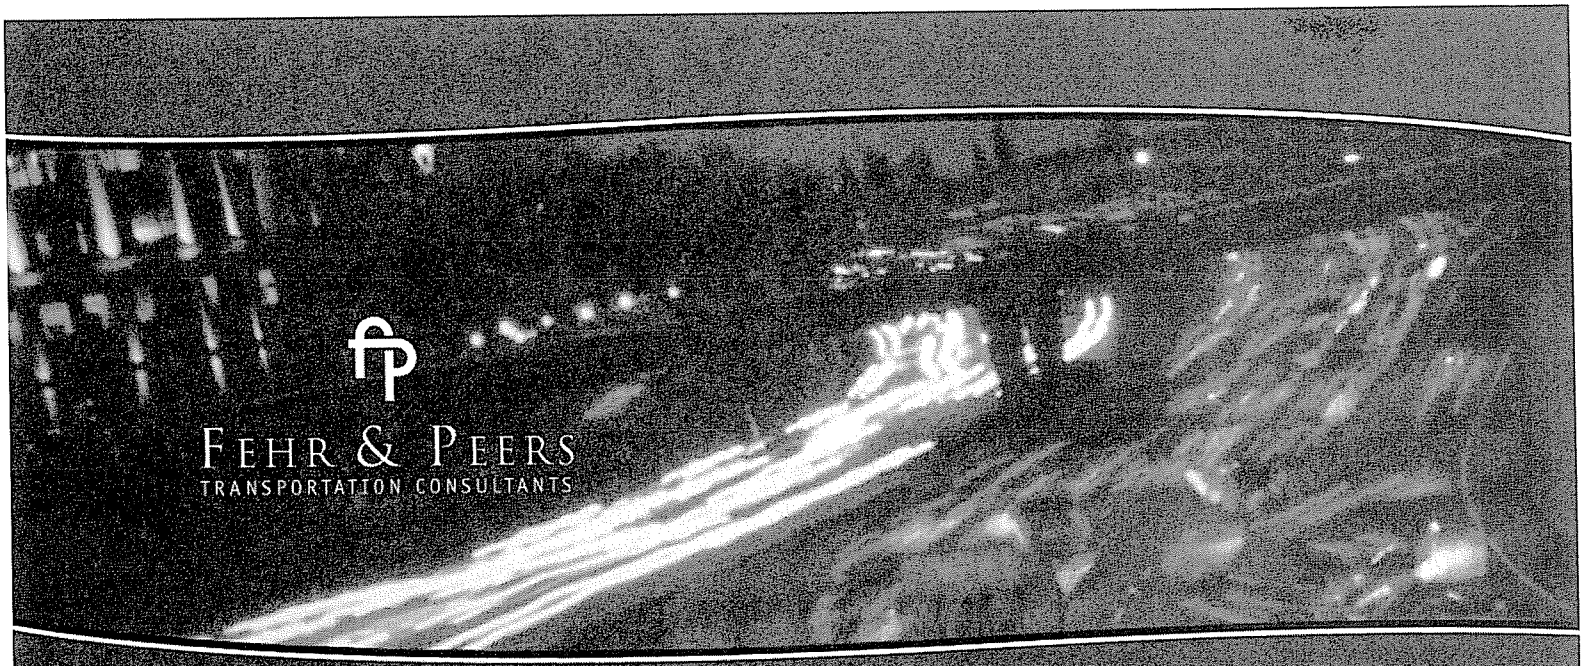


*Draft Report*
*Transportation Impact Analysis*

# Cochrane Road PUD
# Morgan Hill, CA

*July 2005*

*Prepared for:*
*Pacific Municipal Consultants*

*Prepared by:*
*Fehr & Peers*

**Draft Report**

# COCHRANE ROAD PUD

Prepared for:

**Pacific Municipal Consultants**

Prepared by:
**Fehr & Peers**

**July 2005**

# TABLE OF CONTENTS

**EXECUTIVE SUMMARY** ..... **iv**
PROJECT TRIPS ..... IV
INTERSECTION LEVELS OF SERVICE ..... IV
INTERSECTION IMPACTS AND MITIGATION MEASURES ..... V
FREEWAY IMPACT ANALYSIS ..... V
SITE ACCESS AND ON-SITE CIRCULATION ..... X
PARKING ..... X
PEDESTRIAN, BIKE, AND TRANSIT IMPACTS ..... XI
CUMULATIVE CONDITIONS ..... XI
ALTERNATE PROJECT SCENARIO ..... XII
**1. INTRODUCTION** ..... **1**
**2. EXISTING CONDITIONS** ..... **5**
ROADWAY NETWORK ..... 5
EXISTING TRANSIT SERVICE ..... 6
EXISTING PEDESTRIAN AND BICYCLE FACILITIES ..... 8
EXISTING INTERSECTION VOLUMES AND LANE CONFIGURATIONS ..... 8
LEVEL OF SERVICE METHODOLOGY ..... 8
EXISTING INTERSECTION LEVELS OF SERVICE ..... 15
EXISTING FREEWAY SEGMENT LEVELS OF SERVICE ..... 17
FIELD OBSERVATIONS ..... 18
**3. BACKGROUND CONDITIONS** ..... **19**
BACKGROUND TRAFFIC ESTIMATES ..... 19
BACKGROUND INTERSECTION LEVELS OF SERVICE ..... 19
**4. PROJECT CONDITIONS** ..... **23**
PROJECT LAND USES ..... 23
PROJECT ROADWAY IMPROVEMENTS ..... 23
PROJECT TRAFFIC ESTIMATES ..... 24
PROJECT INTERSECTION LEVELS OF SERVICE ..... 26
INTERSECTION IMPACT CRITERIA ..... 33
INTERSECTION IMPACTS ..... 33
INTERSECTION MITIGATION MEASURES ..... 34
FREEWAY SEGMENT ANALYSIS ..... 36

FREEWAY SEGMENT MITIGATION ..... **ERROR! BOOKMARK NOT DEFINED.**
SITE ACCESS AND ON-SITE CIRCULATION ..... 37
PARKING ..... 39
PEDESTRIAN, BIKE, AND TRANSIT IMPACTS ..... 42
**5. PROJECT CONDITIONS WITH ALTERNATE PROJECT DESCRIPTION ..... 44**
ALTERNATE PROJECT TRAFFIC ESTIMATES ..... 44
ALTERNATE PROJECT INTERSECTION LEVELS OF SERVICE ..... 44
ALTERNATE PROJECT INTERSECTION IMPACTS ..... 45
ALTERNATE PROJECT INTERSECTION MITIGATION MEASURES ..... 45
ALTERNATE PROJECT PARKING ..... 48
OTHER ALTERNATE PROJECT IMPACTS ..... 50
**6. CUMULATIVE CONDITIONS ..... 51**
CUMULATIVE TRAFFIC ESTIMATES ..... 51
CUMULATIVE ROADWAY IMPROVEMENTS ..... 51
CUMULATIVE INTERSECTION LEVELS OF SERVICE ..... 51
CUMULATIVE IMPACTS ..... 57
CUMULATIVE MITIGATION MEASURES ..... 57
**7. GENERAL PLAN BUILDOUT CONDITIONS ..... 58**
GENERAL PLAN BUILDOUT TRAFFIC ESTIMATES ..... 58
GENERAL PLAN BUILDOUT INTERSECTION LEVELS OF SERVICE ..... 61

Technical Appendices
Appendix A - Intersection Traffic Counts
Appendix B - Level of Service Calculation Sheets
Appendix C - Approved and Pending Developments
Appendix D - Caltrans Signal Warrants
Appendix E – Queuing Calculation Sheets
Appendix F – Shared Parking Analysis
Appendix G - Furness Description,and Output Spreadsheets
Appendix H – CMP Deficiency Plan Guidelines Immediate Implementation Action List

## LIST OF TABLES

**Table** **Page**

ES-1. Intersection Level of Service Summary ..... vi
ES-2. Intersection Level of Service Summary ..... viii
1. Signalized Intersection Level of Service Definitions Using Average Control Vehicular Delay ..... 14
2. Unsignalized Intersection Level of Service Definitions Using Average Control Delay ..... 15
3. Density-Based Freeway Levels of Service ..... 15
4. Existing Intersection Levels of Service ..... 17
5. Existing Freeway Segment Levels of Service ..... 18
6. Background Intersection Levels of Service ..... 23
7. Project Trip Generation Estimates ..... 26
8. Background and Project Intersection Levels of Service ..... 33
9. US 101 Freeway Segment Analysis ..... 37
10. Alternate Project (With Supermarket) Trip Generation Estimates ..... 42
11. Background and Alternate Project Intersection Levels of Service ..... 43
12. Cumulative No Project and Cumulative Plus Project Intersection Levels of Service ..... 56
13. General Plan Buildout Peak-Hour Intersection Levels of Service ..... 54

## LIST OF FIGURES

**Figure** **Page**

1. Site Location ..... 2
2. Preliminary Site Plan ..... 3
3. Existing Transit Service ..... 7
4. Existing Bike Lanes and Pedestrian Facilities ..... 9
5. Existing Peak-Hour Intersection Volumes ..... 10
6. Existing Lane Configurations ..... 12
7. Background Peak-Hour Intersection Volumes ..... 21
8. Project Trip Distribution ..... 28
9. Project Trip Assignment ..... 29
10. Background Plus Project Peak-Hour Intersection Volumes ..... 31
11. Proposed Mitigation Measures ..... 37
12. Cumulative No Project Peak-Hour Intersection Volumes ..... 52
13. Cumulative Plus Project Peak-Hour Intersection Volumes ..... 54
14 General Plan Proposed Network Change ..... 59
15. General Plan (2025) Buildout Intersection Volumes ..... 60